




FASTENERS FOR PANELS

Clip-on closing systems

Recommended use:

These systems, which require very little space, consist of a stud that clips into a spring fastener. The fasteners are fitted to the support from the outside and automatically lock in position. The system is opened and closed by simple pulling or pressing force.

FASTENER

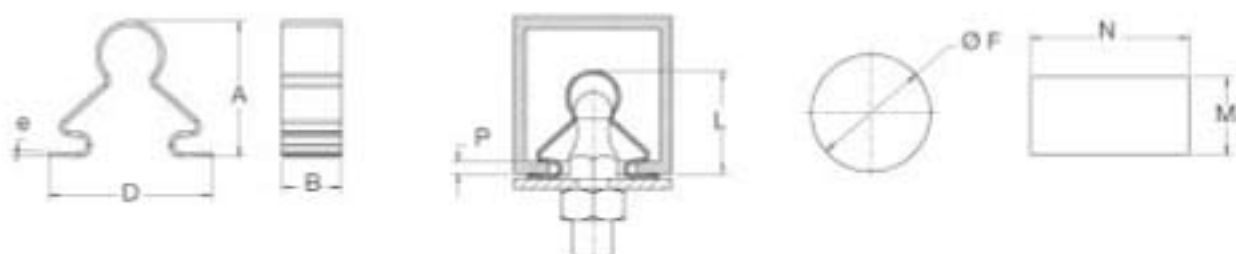


P = PANEL THICKNESS	REFERENCE	A	B	D*	e	Ø F	M	N	AVERAGE INSERTION FORCE** (DaN)	AVERAGE EXTRACTION FORCE** (DaN)
0.5 to 0.8	C 4434-1	13.4	6	16.5	0.4	10.5	7	9	9	8
0.9 to 1.2	C 4434-2	13.8	6	16.5	0.4	10.5	7	9	8	8
0.9 to 1.2	C 4438-2	13.8	8	15.2	0.4	11.4	8.3	8	18	14
1.3 to 1.6	C 4434-3	14.2	6	16.4	0.4	10.5	7	9	8	8
1.7 to 2	C 4434-4	14.6	6	16.3	0.4	10.5	7	9	7	7
2.9 to 3.2	C 4434-7	15.8	6	16.7	0.4	10.5	7	9	7	7

Dimension D is quoted for the assembled part.

Average force recorded in the lab on a typical assembly.

STUD

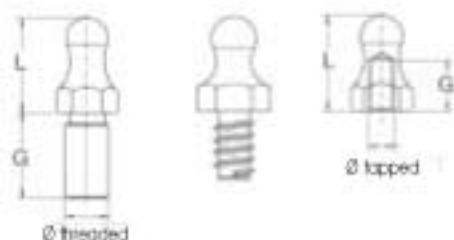

P = PANEL THICKNESS	L	REFERENCE	Ø	G
0.5 to 0.8	11.4	R 7053	42 metal/wood screw type	8
0.9 to 1.2	12	R 6333	M5 threaded	10
1.3 to 1.6	12.7	R 6652	M4 threaded	5
1.3 to 1.6	12.7	R 6299	M5 threaded	10
1.7 to 2	12.7	R 6299	M5 threaded	10
1.7 to 2	12.7	R 6707	M3 tapped	4.5
1.7 to 2	12.7	R 6652	M4 threaded	5
2.9 to 3.2	14	R 6486	M5 threaded	10

	FASTENER	STUD
MATERIAL	Treated spring steel	Steel
SURFACE	Phosphating	Zinc plating
TREATMENT	+ lacquer	
COLOUR	Black	White